

Indoor & Project Smart Lock Catalogue

2026 / 58 model selections

Compare access methods, app versions, door fit and packing for brand, distributor and project sourcing.



196



DS01



H-21

Select one configuration. Confirm the sample and installation details before ordering.

Request a Quote

gwaylock.com/contact | sales@gwaylock.com

Choose a platform for your project

This catalogue groups 58 identified models. App choices describe separate versions. Missing information remains subject to confirmation for the selected model and order.

Product family	Models
Lever Smart Locks	12
Split Smart Locks	8
Panel Smart Locks	15
Rim-Mounted Smart Locks	1
Deadbolt Smart Locks	6
Knob Smart Locks	2
Glass & Sliding Door Smart Locks	4
Face Recognition Smart Locks	6
Display & Camera Smart Locks	3
Aluminum Door Smart Locks	1

Configuration

Specify the model, access methods and required app. Confirm firmware, connectivity and any gateway requirements for that version.

Installation

Send door material, thickness, handing and existing cutout. Panel measurements alone do not prove compatibility; glass/sliding-door mounting needs specific confirmation.

Procurement

Packing values assist freight planning. Carton quantity is not MOQ. Sample cost, MOQ, lead time and documents are confirmed against the selected version.

Model resources

Each model has its own product page and quote link. Larger product photos and available dimension diagrams can be reviewed at gwaylock.com/products.

Model index

PDF page numbers below link to each model sheet.

130	4	P12	24	DS06	44
180	5	P13	25	DS07	45
182	6	P14	26	Q1	46
190	7	P15	27	Q2	47
196	8	P16	28	A5	48
197	9	P17	29	A16	49
197B	10	P17Q	30	B02	50
198	11	P18	31	B03	51
Z01	12	P19	32	H-03	52
Z02	13	P20	33	H-18	53
230	14	L130	34	H-21	54
280	15	L190	35	H-22	55
290	16	L198	36	H-23	56
296	17	LZ02	37	H-68	57
297	18	BX02	38	H-01	58
297B	19	N01	39	H-05	59
298	20	DS01	40	H-09	60
2Z02	21	DS02	41	H-08	61
P30	22	DS04	42		
P40	23	DS05	43		

130 Handle Smart Lock

Lever Smart Locks



Round-rosette fingerprint handle with 50 fingerprint slots and separate standalone, Tuya Bluetooth and TTLock versions for interior door sourcing.


REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Mechanical key
Communication	Tuya Bluetooth version; TTLock version (confirm connectivity and gateway requirements). Select one version.
Supported versions	
Catalogue versions	Standalone, Tuya (Bluetooth), TTLock
Packing	
Box dimensions	253 × 178 × 74 mm
Box weight	0.92 kg
Carton dimensions	525 × 375 × 390 mm
Units per carton	20
Carton weight	19.6 kg

User capacity	
Fingerprints	50
Power, material and environment	
Power supply	6 V (4 × AAA alkaline batteries)
Material	Zinc alloy
Finish	Confirm selected finish
Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	30-50 mm
Panel dimensions	Front and rear: 145 × 64 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation
Additional catalogue specifications	
Voice guidance	Not supported

180 Handle Smart Lock

Lever Smart Locks

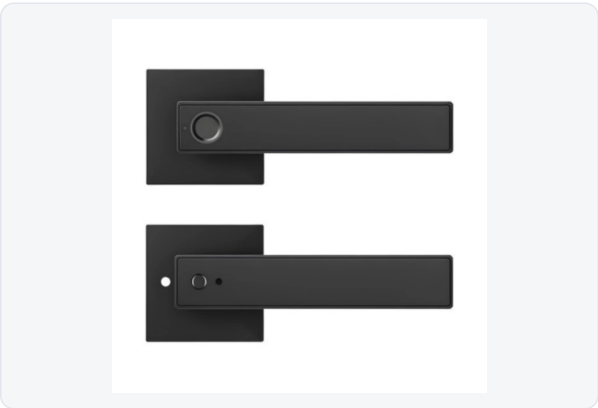

Square-rosette aluminum handle offering fingerprint and mechanical-key access with four-AAA power for apartment and office door projects.


REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Mechanical key
Communication	Tuya Bluetooth version; TLock version (confirm connectivity and gateway requirements). Select one version.
Supported versions	
Catalogue versions	Standalone, Tuya (Bluetooth), TLock
Packing	
Box dimensions	253 × 178 × 74 mm
Box weight	0.82 kg
Carton dimensions	525 × 375 × 390 mm
Units per carton	20
Carton weight	17.6 kg

User capacity	
Fingerprints	50
Power, material and environment	
Power supply	6 V (4 × AAA alkaline batteries)
Material	Aluminum alloy
Finish	Confirm selected finish
Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	30-50 mm
Panel dimensions	Front and rear: 144 × 65 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation
Additional catalogue specifications	
Voice guidance	Not supported

182 Handle Smart Lock

Lever Smart Locks

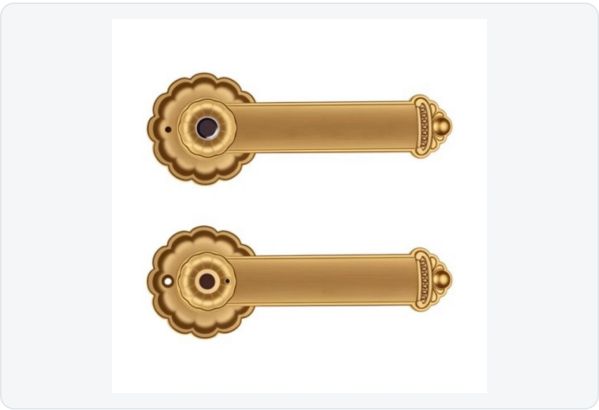

Decorative fingerprint handle for interior door collections, with 50 fingerprint slots and source-listed standalone or Tuya Bluetooth versions.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Mechanical key
Communication	Tuya Bluetooth version. Select one version.
Power, material and environment	
Power supply	6 V (4 × AAA alkaline batteries)
Material	Zinc alloy
Finish	Confirm selected finish
Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	30-50 mm
Panel dimensions	Front and rear: 143 × 65 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation

Supported versions	
Catalogue versions	Standalone, Tuya (Bluetooth)
User capacity	
Fingerprints	50
Additional catalogue specifications	
Voice guidance	Not supported
Packing	
Box dimensions	253 × 178 × 74 mm
Box weight	1.1 kg
Carton dimensions	525 × 375 × 390 mm
Units per carton	20
Carton weight	23 kg

190 Handle Smart Lock

Lever Smart Locks



Round-rosette keypad handle with fingerprint, passcode, card and key access; each electronic credential type has a listed capacity of 100.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Bluetooth version; TTLock version (confirm connectivity and gateway requirements). Select one version.

Power, material and environment	
Power supply	6 V (4 × AAA alkaline batteries)
Material	Zinc alloy
Finish	Confirm selected finish

Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	30-50 mm
Panel dimensions	Front and rear: 150 × 64 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation

Supported versions	
Catalogue versions	Standalone, Tuya (Bluetooth), TTLock

User capacity	
Fingerprints	100
Passwords	100
Cards	100

Additional catalogue specifications	
Voice guidance	Not supported

Packing	
Box dimensions	253 × 178 × 74 mm
Box weight	0.91 kg
Carton dimensions	525 × 375 × 390 mm
Units per carton	20
Carton weight	19.4 kg

196 Handle Smart Lock

Lever Smart Locks



Compact keypad handle with 100 fingerprint, passcode and card slots, separate app versions and a model-specific packing specification for import planning.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Bluetooth version; TTLock version (confirm connectivity and gateway requirements). Select one version.

Supported versions	
Catalogue versions	Standalone, Tuya (Bluetooth), TTLock

Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	30-50 mm
Panel dimensions	Front and rear: 150 × 64 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation

Selection notes	
This model is maintained as 196. Similar appearance to another product is not confirmation of a model alias.	

User capacity	
Fingerprints	100
Passwords	100
Cards	100

Power, material and environment	
Power supply	6 V (4 × AAA alkaline batteries)
Material	Zinc alloy
Finish	Confirm selected finish

Additional catalogue specifications	
Voice guidance	Not supported

Packing	
Box dimensions	218 × 178 × 73 mm
Box weight	0.91 kg
Carton dimensions	450 × 370 × 390 mm
Units per carton	20
Carton weight	19 kg

197 Handle Smart Lock

Lever Smart Locks



Square-rosette aluminum keypad handle with four access methods and separate standalone, Tuya Bluetooth or TTLock configurations.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Bluetooth version; TTLock version (confirm connectivity and gateway requirements). Select one version.

Power, material and environment	
Power supply	6 V (4 × AAA alkaline batteries)
Material	Aluminum alloy
Finish	Confirm selected finish

Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	30-50 mm
Panel dimensions	Front and rear: 150 × 65 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation

Supported versions	
Catalogue versions	Standalone, Tuya (Bluetooth), TTLock

User capacity	
Fingerprints	100
Passwords	100
Cards	100

Additional catalogue specifications	
Voice guidance	Not supported

Packing	
Box dimensions	253 × 178 × 74 mm
Box weight	0.74 kg
Carton dimensions	525 × 375 × 390 mm
Units per carton	20
Carton weight	16 kg

197B Handle Smart Lock

Lever Smart Locks



The 197B keypad layout uses a 150 × 65 mm handle format and smaller listed box dimensions than 197; confirm the chosen layout when requesting a sample.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Bluetooth version; TTLock version (confirm connectivity and gateway requirements). Select one version.

Power, material and environment	
Power supply	6 V (4 × AAA alkaline batteries)
Material	Aluminum alloy
Finish	Confirm selected finish

Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	30-50 mm
Panel dimensions	Front and rear: 150 × 65 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation

Supported versions	
Catalogue versions	Standalone, Tuya (Bluetooth), TTLock

User capacity	
Fingerprints	100
Passwords	100
Cards	100

Additional catalogue specifications	
Voice guidance	Not supported

Packing	
Box dimensions	218 × 178 × 73 mm
Box weight	0.74 kg
Carton dimensions	450 × 370 × 390 mm
Units per carton	20
Carton weight	16 kg

198 Handle Smart Lock

Lever Smart Locks



Fingerprint keypad handle with eight catalogue-listed voice languages and standalone or Tuya Bluetooth versions for multilingual interior-door projects.


REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Bluetooth version. Select one version.
User capacity	
Fingerprints	100
Passwords	100
Cards	100
Power, material and environment	
Power supply	6 V (4 × AAA alkaline batteries)
Material	Zinc alloy
Finish	Confirm selected finish
Video, display and voice	
Languages	Chinese, English, Portuguese, Spanish, French, Arabic, Indonesian, Russian

Supported versions	
Catalogue versions	Standalone, Tuya (Bluetooth)
Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	30-50 mm
Panel dimensions	Front and rear: 147 × 65 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation
Packing	
Box dimensions	218 × 178 × 73 mm
Box weight	0.96 kg
Carton dimensions	450 × 370 × 390 mm
Units per carton	20
Carton weight	20 kg

Z01 Handle Smart Lock

Lever Smart Locks

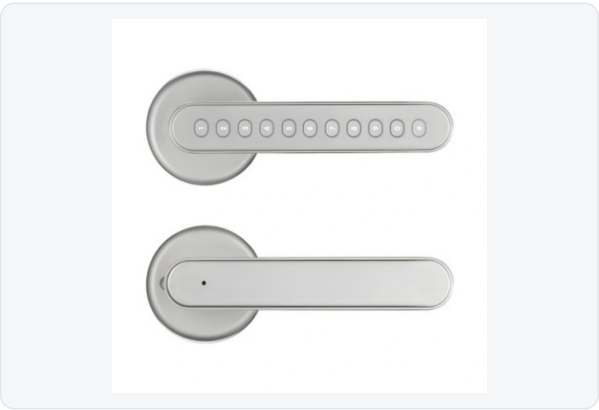

Passcode-and-key aluminum handle with 100 passcode slots and a Tuya Bluetooth version. Fingerprint and card access are not listed for Z01.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Passcode, Mechanical key
Communication	Tuya Bluetooth version. Select one version.

Power, material and environment	
Power supply	6 V (4 × AAA alkaline batteries)
Material	Aluminum alloy
Finish	Confirm selected finish

Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	30-50 mm
Panel dimensions	Front and rear: 155 × 65 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation

Supported versions	
Catalogue versions	Tuya (Bluetooth)

User capacity	
Passwords	100

Additional catalogue specifications	
Voice guidance	Not supported

Packing	
Box dimensions	253 × 178 × 74 mm
Box weight	0.76 kg
Carton dimensions	525 × 375 × 390 mm
Units per carton	20
Carton weight	15.8 kg

Z02 Handle Smart Lock

Lever Smart Locks



Aluminum fingerprint keypad handle with a 155 mm format, four access methods and separate standalone, Tuya Bluetooth and TTLock versions.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Bluetooth version; TTLock version (confirm connectivity and gateway requirements). Select one version.
Power, material and environment	
Power supply	6 V (4 × AAA alkaline batteries)
Material	Aluminum alloy
Finish	Confirm selected finish
Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	30-50 mm
Panel dimensions	Front and rear: 155 × 65 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation

Supported versions	
Catalogue versions	Standalone, Tuya (Bluetooth), TTLock
User capacity	
Fingerprints	100
Passwords	100
Cards	100
Additional catalogue specifications	
Voice guidance	Not supported
Packing	
Box dimensions	253 × 178 × 74 mm
Box weight	0.74 kg
Carton dimensions	525 × 375 × 390 mm
Units per carton	20
Carton weight	16.6 kg

230 Split Smart Lock

Split Smart Locks



Round split-handle set with a separate rear escutcheon, 50 fingerprint slots and four catalogue-listed lock-body options for door-fit evaluation.


REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Mechanical key
Communication	Tuya Bluetooth version; TLock version (confirm connectivity and gateway requirements). Select one version.
Supported versions	
Catalogue versions	Standalone, Tuya (Bluetooth), TLock
Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	30-50 mm
Panel dimensions	Handle: 145 × 56 mm; rear escutcheon: 56 × 56 mm (height × width)
Lock body / mortise	4558 / 5058 / 5085 / 5572 lock-body options; confirm door preparation

User capacity	
Fingerprints	50
Power, material and environment	
Power supply	6 V (4 × AAA alkaline batteries)
Material	Zinc alloy
Finish	Confirm selected finish
Additional catalogue specifications	
Voice guidance	Not supported
Packing	
Box dimensions	257 × 200 × 90 mm
Box weight	1.41 kg
Carton dimensions	535 × 410 × 380 mm
Units per carton	16
Carton weight	23.84 kg

280 Split Smart Lock

Split Smart Locks

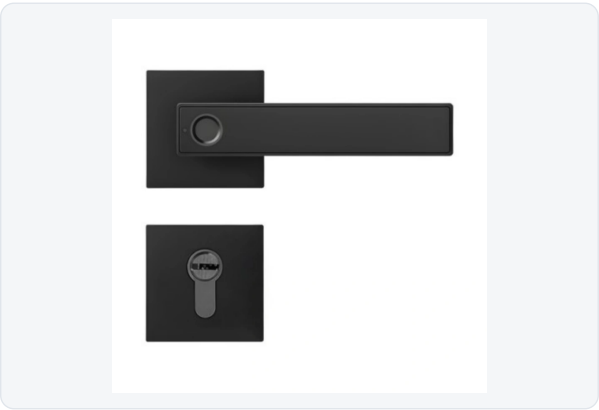

Square split-handle set with 100 fingerprint slots, mechanical-key access and separate standalone, Tuya Bluetooth or TTLock versions.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Mechanical key
Communication	Tuya Bluetooth version; TTLock version (confirm connectivity and gateway requirements). Select one version.
Supported versions	
Catalogue versions	Standalone, Tuya (Bluetooth), TTLock
Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	30-50 mm
Panel dimensions	Handle: 145 × 56 mm; rear escutcheon: 56 × 56 mm (height × width)
Lock body / mortise	4558 / 5058 / 5085 / 5572 lock-body options; confirm door preparation

User capacity	
Fingerprints	100
Power, material and environment	
Power supply	6 V (4 × AAA alkaline batteries)
Material	Zinc alloy
Finish	Confirm selected finish
Additional catalogue specifications	
Voice guidance	Not supported
Packing	
Box dimensions	257 × 200 × 90 mm
Box weight	1.41 kg
Carton dimensions	535 × 410 × 380 mm
Units per carton	16
Carton weight	23.84 kg

290 Split Smart Lock

Split Smart Locks



Round split keypad handle with fingerprint, passcode, card and key access, intended for brands evaluating a separate-handle door configuration.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Bluetooth version; TTLock version (confirm connectivity and gateway requirements). Select one version.
User capacity	
Fingerprints	100
Passwords	100
Cards	100
Power, material and environment	
Power supply	6 V (4 × AAA alkaline batteries)
Material	Zinc alloy
Finish	Confirm selected finish
Additional catalogue specifications	
Voice guidance	Not supported

Supported versions	
Catalogue versions	Standalone, Tuya (Bluetooth), TTLock
Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	30-50 mm
Panel dimensions	Handle: 150 × 56 mm; rear escutcheon: 56 × 56 mm (height × width)
Lock body / mortise	4558 / 5058 / 5085 / 5572 lock-body options; confirm door preparation
Packing	
Box dimensions	257 × 200 × 90 mm
Box weight	1.42 kg
Carton dimensions	535 × 410 × 380 mm
Units per carton	16
Carton weight	24 kg

296 Split Smart Lock

Split Smart Locks



Split keypad handle with a compact number layout and 100 slots per electronic credential type; confirm the mortise and door preparation before sampling.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Bluetooth version; TTLock version (confirm connectivity and gateway requirements). Select one version.
User capacity	
Fingerprints	100
Passwords	100
Cards	100
Power, material and environment	
Power supply	6 V (4 × AAA alkaline batteries)
Material	Zinc alloy
Finish	Confirm selected finish
Additional catalogue specifications	
Voice guidance	Not supported

Supported versions	
Catalogue versions	Standalone, Tuya (Bluetooth), TTLock
Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	30-50 mm
Panel dimensions	Handle: 150 × 56 mm; rear escutcheon: 56 × 56 mm (height × width)
Lock body / mortise	4558 / 5058 / 5085 / 5572 lock-body options; confirm door preparation
Packing	
Box dimensions	257 × 200 × 90 mm
Box weight	1.43 kg
Carton dimensions	535 × 410 × 380 mm
Units per carton	16
Carton weight	24 kg

297 Split Smart Lock

Split Smart Locks



Square aluminum split keypad handle with a 65 mm escutcheon, four access methods and source-listed packing of 16 sets per carton.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Bluetooth version; TTLock version (confirm connectivity and gateway requirements). Select one version.
User capacity	
Fingerprints	100
Passwords	100
Cards	100
Power, material and environment	
Power supply	6 V (4 × AAA alkaline batteries)
Material	Aluminum alloy
Finish	Confirm selected finish
Additional catalogue specifications	
Voice guidance	Not supported

Supported versions	
Catalogue versions	Standalone, Tuya (Bluetooth), TTLock
Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	30-50 mm
Panel dimensions	Handle: 150 × 65 mm; rear escutcheon: 65 × 65 mm (height × width)
Lock body / mortise	4558 / 5058 / 5085 / 5572 lock-body options; confirm door preparation
Packing	
Box dimensions	257 × 200 × 90 mm
Box weight	1.42 kg
Carton dimensions	535 × 410 × 380 mm
Units per carton	16
Carton weight	24 kg

297B Split Smart Lock

Split Smart Locks



The 297B split-handle keypad layout has fingerprint, passcode, card and key access; select the exact 297B layout and app version for sample evaluation.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Bluetooth version; TTLock version (confirm connectivity and gateway requirements). Select one version.
User capacity	
Fingerprints	100
Passwords	100
Cards	100
Power, material and environment	
Power supply	6 V (4 × AAA alkaline batteries)
Material	Aluminum alloy
Finish	Confirm selected finish
Additional catalogue specifications	
Voice guidance	Not supported

Supported versions	
Catalogue versions	Standalone, Tuya (Bluetooth), TTLock
Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	30-50 mm
Panel dimensions	Handle: 150 × 65 mm; rear escutcheon: 65 × 65 mm (height × width)
Lock body / mortise	4558 / 5058 / 5085 / 5572 lock-body options; confirm door preparation
Packing	
Box dimensions	257 × 200 × 90 mm
Box weight	1.42 kg
Carton dimensions	535 × 410 × 380 mm
Units per carton	16
Carton weight	24 kg

298 Split Smart Lock

Split Smart Locks



A 147 mm split keypad handle with standalone and Tuya Bluetooth versions, four access methods and model-specific carton weight for import planning.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Bluetooth version. Select one version.
Supported versions	
Catalogue versions	Standalone, Tuya (Bluetooth)
User capacity	
Fingerprints	100
Passwords	100
Cards	100
Power, material and environment	
Power supply	6 V (4 × AAA alkaline batteries)
Material	Zinc alloy
Finish	Confirm selected finish

Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	30-50 mm
Panel dimensions	Handle: 147 × 56 mm; rear escutcheon: 56 × 56 mm (height × width)
Lock body / mortise	4558 / 5058 / 5085 / 5572 lock-body options; confirm door preparation
Additional catalogue specifications	
Voice guidance	Not supported
Packing	
Box dimensions	257 × 200 × 90 mm
Box weight	1.46 kg
Carton dimensions	535 × 410 × 380 mm
Units per carton	16
Carton weight	24.48 kg

2Z02 Split Smart Lock

Split Smart Locks



Compact 129 mm split keypad handle with a 68 mm rear escutcheon and separate app versions, for buyers comparing smaller interior-door handle formats.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Bluetooth version; TTLock version (confirm connectivity and gateway requirements). Select one version.
User capacity	
Fingerprints	100
Passwords	100
Cards	100
Power, material and environment	
Power supply	6 V (4 × AAA alkaline batteries)
Material	Zinc alloy
Finish	Confirm selected finish
Additional catalogue specifications	
Voice guidance	Not supported

Supported versions	
Catalogue versions	Standalone, Tuya (Bluetooth), TTLock
Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	30-50 mm
Panel dimensions	Handle: 129 × 68 mm; rear escutcheon: 68 × 68 mm (height × width)
Lock body / mortise	4558 / 5058 / 5085 / 5572 lock-body options; confirm door preparation
Packing	
Box dimensions	257 × 200 × 90 mm
Box weight	1.43 kg
Carton dimensions	535 × 410 × 380 mm
Units per carton	16
Carton weight	24 kg

P30 Handle Smart Lock

Lever Smart Locks



Slim 32 mm keypad handle from the Eco series, with 50 fingerprint and 100 passcode/card slots plus mechanical-key access; confirm the selected zinc or aluminum material version.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Bluetooth version. Select one version.

Power, material and environment	
Power supply	6 V (4 × AAA alkaline batteries)
Material	Zinc alloy / aluminum alloy (confirm selected version)
Finish	Confirm selected finish

Packing	
Box dimensions	230 × 174 × 54 mm
Box weight	1.15 kg
Carton dimensions	480 × 365 × 240 mm
Units per carton	16
Carton weight	19 kg

Supported versions	
Catalogue versions	Standalone, Tuya (Bluetooth)

User capacity	
Fingerprints	50
Passwords	100
Cards	100

Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	30-50 mm
Panel dimensions	Front and rear: 156 × 32 mm (height × width)
Lock body / mortise	60 mm latch backset; confirm door preparation

Additional catalogue specifications	
Voice guidance	Not supported

P40 Handle Smart Lock

Lever Smart Locks



Slim aluminum fingerprint handle with a 156 × 32 mm format and Tuya Bluetooth version, providing a simpler access configuration than P30.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Mechanical key
Communication	Tuya Bluetooth version. Select one version.

Power, material and environment	
Power supply	6 V (4 × AAA alkaline batteries)
Material	Aluminum alloy
Finish	Confirm selected finish

Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	30-50 mm
Panel dimensions	Front and rear: 156 × 32 mm (height × width)
Lock body / mortise	60 mm latch backset; confirm door preparation

Supported versions	
Catalogue versions	Tuya (Bluetooth)

User capacity	
Fingerprints	50

Additional catalogue specifications	
Voice guidance	Not supported

Packing	
Box dimensions	230 × 174 × 54 mm
Box weight	0.92 kg
Carton dimensions	480 × 365 × 240 mm
Units per carton	16
Carton weight	15.5 kg

P12 Panel Smart Lock

Panel Smart Locks



A 246 mm panel lever lock with six listed voice languages, 100 fingerprint/passcode/card slots and multiple separate catalogue versions.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Bluetooth version; Catalogue-labeled standalone Wi-Fi configuration (confirm network and app behavior); TLock version (confirm connectivity and gateway requirements). Select one version.
Video, display and voice	
Languages	Chinese, English, Portuguese, Spanish, French, Arabic
Packing	
Box dimensions	335 × 170 × 120 mm
Box weight	1.7 kg
Carton dimensions	620 × 345 × 360 mm
Units per carton	10
Carton weight	17.8 kg
Selection notes	
The source labels a 'Standalone (Wi-Fi)' version. Confirm its network and app behavior; this label does not identify a Tuya Wi-Fi version.	

Supported versions	
Catalogue versions	Standalone (Wi-Fi; confirm configuration), Tuya (Bluetooth), TLock
User capacity	
Fingerprints	100
Passwords	100
Cards	100
Power, material and environment	
Power supply	6 V (4 × AA alkaline batteries)
Material	Aluminum alloy
Finish	Confirm selected finish
Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	35-65 mm
Panel dimensions	Front and rear: 246 × 56 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation; 4558 / 5058 / 5085 / 5572 lock-body options; confirm door preparation

P13 Panel Smart Lock

Panel Smart Locks



Compact 181 mm aluminum panel lever model with fingerprint, passcode, card and mechanical-key access for buyers comparing shorter panel formats.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Bluetooth version; Catalogue-labeled standalone Wi-Fi configuration (confirm network and app behavior); TTLock version (confirm connectivity and gateway requirements). Select one version.
Video, display and voice	
Languages	Chinese, English, Portuguese, Spanish, French, Arabic
Packing	
Box dimensions	335 × 170 × 120 mm
Box weight	1.7 kg
Carton dimensions	620 × 345 × 360 mm
Units per carton	10
Carton weight	17.8 kg
Selection notes	
The source labels a 'Standalone (Wi-Fi)' version. Confirm its network and app behavior; this label does not identify a Tuya Wi-Fi version.	

Supported versions	
Catalogue versions	Standalone (Wi-Fi; confirm configuration), Tuya (Bluetooth), TTLock
User capacity	
Fingerprints	100
Passwords	100
Cards	100
Power, material and environment	
Power supply	6 V (4 × AA alkaline batteries)
Material	Aluminum alloy
Finish	Confirm selected finish
Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	35-50 mm
Panel dimensions	Front and rear: 181 × 68 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation; 4558 / 5058 / 5085 / 5572 lock-body options; confirm door preparation

P14 Panel Smart Lock

Panel Smart Locks



A 258 mm panel lever model with fingerprint, passcode, card and key access and the source's standalone Wi-Fi configuration label.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Catalogue-labeled standalone Wi-Fi configuration (confirm network and app behavior). Select one version.
Supported versions	
Catalogue versions	Standalone (Wi-Fi; confirm configuration)
Power, material and environment	
Power supply	6 V (4 × AA alkaline batteries)
Material	Aluminum alloy
Finish	Confirm selected finish
Video, display and voice	
Languages	Chinese, English, Portuguese, Spanish, French, Arabic
Selection notes	
The source labels a 'Standalone (Wi-Fi)' version. Confirm its network and app behavior; this label does not identify a Tuya Wi-Fi version.	

User capacity	
Fingerprints	100
Passwords	100
Cards	100
Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	35-65 mm
Panel dimensions	Front and rear: 258 × 62 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation; 4558 / 5058 / 5085 / 5572 lock-body options; confirm door preparation
Packing	
Box dimensions	330 × 210 × 128 mm
Box weight	1.9 kg
Carton dimensions	660 × 340 × 440 mm
Units per carton	10
Carton weight	20.2 kg

P15 Panel Smart Lock

Panel Smart Locks



Face-capable 270 mm panel lever model with 100 face slots and two 18650 lithium batteries; confirm the source-listed standalone Wi-Fi configuration.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Face recognition, Fingerprint, Passcode, RF card, Mechanical key
Communication	Catalogue-labeled standalone Wi-Fi configuration (confirm network and app behavior). Select one version.

Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	35-65 mm
Panel dimensions	Front and rear: 270 × 65 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation; 4558 / 5058 / 5085 / 5572 lock-body options; confirm door preparation

Video, display and voice	
Languages	Chinese, English, Portuguese, Spanish, French, Arabic

Selection notes	
The source labels a 'Standalone (Wi-Fi)' version. Confirm its network and app behavior; this label does not identify a Tuya Wi-Fi version. Battery energy capacity, camera resolution and display size are not specified; confirm the selected version.	

Supported versions	
Catalogue versions	Standalone (Wi-Fi; confirm configuration)

User capacity	
Fingerprints	100
Passwords	100
Cards	100
Faces	100

Power, material and environment	
Power supply	7.4 V (2 × 18650 lithium batteries)
Material	Aluminum alloy
Finish	Confirm selected finish

Packing	
Box dimensions	335 × 170 × 120 mm
Box weight	2.2 kg
Carton dimensions	620 × 345 × 360 mm
Units per carton	10
Carton weight	23 kg

P16 Panel Smart Lock

Panel Smart Locks



A 260 mm panel lever model with ten listed voice languages and 50 fingerprint slots, alongside 100 passcode and card slots.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Bluetooth version; Catalogue-labeled standalone Wi-Fi configuration (confirm network and app behavior); TTLock version (confirm connectivity and gateway requirements). Select one version.
Video, display and voice	
Languages	Chinese, English, Portuguese, Spanish, French, Arabic, Indonesian, Russian, Vietnamese, Thai
Packing	
Box dimensions	335 × 170 × 120 mm
Box weight	1.8 kg
Carton dimensions	620 × 345 × 360 mm
Units per carton	10
Carton weight	19 kg
Selection notes	
The source labels a 'Standalone (Wi-Fi)' version. Confirm its network and app behavior; this label does not identify a Tuya Wi-Fi version.	

Supported versions	
Catalogue versions	Standalone (Wi-Fi; confirm configuration), Tuya (Bluetooth), TTLock
User capacity	
Fingerprints	50
Passwords	100
Cards	100
Power, material and environment	
Power supply	6 V (4 × AA alkaline batteries)
Material	Aluminum alloy
Finish	Confirm selected finish
Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	35-65 mm
Panel dimensions	Front and rear: 260 × 62 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation; 4558 / 5058 / 5085 / 5572 lock-body options; confirm door preparation

P17 Panel Smart Lock

Panel Smart Locks



Short 145 mm panel lever format with eight voice languages, including Hindi; selected packing weights and carton quantities need confirmation.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Catalogue-labeled standalone Wi-Fi configuration (confirm network and app behavior). Select one version.

Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	35-65 mm
Panel dimensions	Front and rear: 145 × 70 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation; 4558 / 5058 / 5085 / 5572 lock-body options; confirm door preparation

Packing	
Box dimensions	238 × 210 × 98 mm
Box weight	Confirm selected version
Carton dimensions	Confirm selected version
Units per carton	Confirm selected version
Carton weight	Confirm selected version

Supported versions	
Catalogue versions	Standalone (Wi-Fi; confirm configuration)

User capacity	
Fingerprints	100
Passwords	100
Cards	100

Power, material and environment	
Power supply	6 V (4 × AA alkaline batteries)
Material	Aluminum alloy
Finish	Confirm selected finish

Video, display and voice	
Languages	Chinese, English, Portuguese, Spanish, French, Arabic, Hindi, Russian

Selection notes	
The source labels a 'Standalone (Wi-Fi)' version. Confirm its network and app behavior; this label does not identify a Tuya Wi-Fi version. The source page calls this a Handle Lock within the panel chapter.	

P17Q Panel Smart Lock

Panel Smart Locks



P17Q combines the short 145 × 70 mm panel format with a knob-style operating handle; verify the chosen layout and final packing before ordering.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Catalogue-labeled standalone Wi-Fi configuration (confirm network and app behavior). Select one version.

Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	35-65 mm
Panel dimensions	Front and rear: 145 × 70 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation; 4558 / 5058 / 5085 / 5572 lock-body options; confirm door preparation

Packing	
Box dimensions	238 × 210 × 98 mm
Box weight	Confirm selected version
Carton dimensions	Confirm selected version
Units per carton	Confirm selected version
Carton weight	Confirm selected version

Supported versions	
Catalogue versions	Standalone (Wi-Fi; confirm configuration)

User capacity	
Fingerprints	100
Passwords	100
Cards	100

Power, material and environment	
Power supply	6 V (4 × AA alkaline batteries)
Material	Aluminum alloy
Finish	Confirm selected finish

Video, display and voice	
Languages	Chinese, English, Portuguese, Spanish, French, Arabic, Hindi, Russian

Selection notes	
The source labels a 'Standalone (Wi-Fi)' version. Confirm its network and app behavior; this label does not identify a Tuya Wi-Fi version. The source page calls this a Handle Lock within the panel chapter.	

P18 Panel Smart Lock

Panel Smart Locks



A 260 mm panel lever model with rechargeable lithium power and Chinese/English voice guidance; app configuration and freight packing require version selection.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Bluetooth version; Catalogue-labeled standalone Wi-Fi configuration (confirm network and app behavior). Select one version.
Power, material and environment	
Power supply	7.4 V rechargeable lithium battery
Material	Aluminum alloy
Finish	Confirm selected finish
Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	35-65 mm
Panel dimensions	Front and rear: 260 × 62 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation; 4558 / 5058 / 5085 / 5572 lock-body options; confirm door preparation

Supported versions	
Catalogue versions	Standalone (Wi-Fi; confirm configuration), Tuya (Bluetooth)
User capacity	
Fingerprints	100
Passwords	100
Cards	100
Video, display and voice	
Languages	Chinese, English
Packing	
Dimensions, weights and carton quantity	Confirm selected version
Selection notes	
The source labels a 'Standalone (Wi-Fi)' version. Confirm its network and app behavior; this label does not identify a Tuya Wi-Fi version. Battery capacity is not specified. The source page calls this a Handle Lock within the panel chapter.	

P19 Panel Smart Lock

Panel Smart Locks



Panel lever model with 100 fingerprint, passcode and card slots. Confirm power, app availability, panel size and packing for the selected version.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Confirm selected version
Supported versions	
Catalogue versions	Confirm selected version
Additional catalogue specifications	
Voice guidance	Confirm selected version
Packing	
Dimensions, weights and carton quantity	Confirm selected version
Selection notes	
The source page calls this a Handle Lock within the panel chapter.	

User capacity	
Fingerprints	100
Passwords	100
Cards	100
Power, material and environment	
Power supply	Confirm selected version
Material	Aluminum alloy
Finish	Confirm selected finish
Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	35-65 mm
Panel dimensions	Confirm selected version
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation; 4558 / 5058 / 5085 / 5572 lock-body options; confirm door preparation

P20 Panel Smart Lock

Panel Smart Locks



Aluminum panel lever model offering fingerprint, passcode, card and key access; request the missing electrical, app, dimension and packing details with the sample.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Confirm selected version
Supported versions	
Catalogue versions	Confirm selected version
Additional catalogue specifications	
Voice guidance	Confirm selected version
Packing	
Dimensions, weights and carton quantity	Confirm selected version
Selection notes	
The source page calls this a Handle Lock within the panel chapter.	

User capacity	
Fingerprints	100
Passwords	100
Cards	100
Power, material and environment	
Power supply	Confirm selected version
Material	Aluminum alloy
Finish	Confirm selected finish
Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	35-65 mm
Panel dimensions	Confirm selected version
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation; 4558 / 5058 / 5085 / 5572 lock-body options; confirm door preparation

L130 Panel Smart Lock

Panel Smart Locks



A 245 mm panel with a fingerprint handle and 50 fingerprint slots, available in separate standalone, Tuya Bluetooth and TTLock versions.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Mechanical key
Communication	Tuya Bluetooth version; TTLock version (confirm connectivity and gateway requirements). Select one version.
Supported versions	
Catalogue versions	Standalone, Tuya (Bluetooth), TTLock
Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	30-50 mm
Panel dimensions	Front and rear: 245 × 53 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation; 4558 / 5058 / 5085 / 5572 lock-body options; confirm door preparation

User capacity	
Fingerprints	50
Power, material and environment	
Power supply	6 V (4 × AAA alkaline batteries)
Material	Zinc alloy
Finish	Confirm selected finish
Additional catalogue specifications	
Voice guidance	Not supported
Packing	
Box dimensions	330 × 210 × 108 mm
Box weight	1.57 kg
Carton dimensions	425 × 350 × 415 mm
Units per carton	10
Carton weight	16 kg

L190 Panel Smart Lock

Panel Smart Locks



Long-panel keypad handle with fingerprint, passcode, card and key access and four-AAA power for interior-door OEM collections.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Bluetooth version; TTLock version (confirm connectivity and gateway requirements). Select one version.

Power, material and environment	
Power supply	6 V (4 × AAA alkaline batteries)
Material	Zinc alloy
Finish	Confirm selected finish

Packing	
Box dimensions	330 × 210 × 108 mm
Box weight	1.53 kg
Carton dimensions	425 × 350 × 415 mm
Units per carton	10
Carton weight	15.6 kg

Supported versions	
Catalogue versions	Standalone, Tuya (Bluetooth), TTLock

User capacity	
Fingerprints	100
Passwords	100
Cards	100

Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	30-50 mm
Panel dimensions	Front and rear: 245 × 53 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation; 4558 / 5058 / 5085 / 5572 lock-body options; confirm door preparation

Additional catalogue specifications	
Voice guidance	Not supported

L198 Panel Smart Lock

Panel Smart Locks



A 245 mm keypad-handle panel with eight listed voice languages and standalone or Tuya Bluetooth configurations for multilingual projects.

REQUEST A MODEL QUOTE

Access and app options

Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Bluetooth version. Select one version.

User capacity

Fingerprints	100
Passwords	100
Cards	100

Power, material and environment

Power supply	6 V (4 × AAA alkaline batteries)
Material	Zinc alloy
Finish	Confirm selected finish

Video, display and voice

Languages	Chinese, English, Portuguese, Spanish, French, Arabic, Indonesian, Russian
-----------	--

Supported versions

Catalogue versions	Standalone, Tuya (Bluetooth)
--------------------	------------------------------

Installation and door fit

Door type	Wood, metal and PVC doors
Door thickness	30-50 mm
Panel dimensions	Front and rear: 245 × 53 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation; 4558 / 5058 / 5085 / 5572 lock-body options; confirm door preparation

Packing

Box dimensions	330 × 210 × 108 mm
Box weight	1.64 kg
Carton dimensions	425 × 350 × 415 mm
Units per carton	10
Carton weight	16.8 kg

LZ02 Panel Smart Lock

Panel Smart Locks



Aluminum long-panel keypad handle with separate Tuya Bluetooth, Tuya Wi-Fi, TTLock and standalone versions; select the network configuration before sampling.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Bluetooth version; Tuya Wi-Fi version (confirm network configuration); TTLock version (confirm connectivity and gateway requirements). Select one version.
Power, material and environment	
Power supply	6 V (4 × AA alkaline batteries)
Material	Aluminum alloy
Finish	Confirm selected finish
Packing	
Box dimensions	330 × 210 × 108 mm
Box weight	1.43 kg
Carton dimensions	425 × 350 × 415 mm
Units per carton	10
Carton weight	15.3 kg

Supported versions	
Catalogue versions	Standalone, Tuya (Bluetooth), Tuya (Wi-Fi), TTLock
User capacity	
Fingerprints	100
Passwords	100
Cards	100
Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	30-50 mm
Panel dimensions	Front and rear: 245 × 53 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation; 4558 / 5058 / 5085 / 5572 lock-body options; confirm door preparation
Additional catalogue specifications	
Voice guidance	Not supported

BX02 Panel Smart Lock

Panel Smart Locks



A 280 mm standalone panel model with 100 face slots and fingerprint, passcode, card and key access; no app version is listed for BX02.

REQUEST A MODEL QUOTE

Access and app options

Catalogue access functions	Face recognition, Fingerprint, Passcode, RF card, Mechanical key
Communication	Standalone; wireless connectivity is not specified

Supported versions

Catalogue versions	Standalone
--------------------	------------

Power, material and environment

Power supply	7 V (1 × rechargeable lithium battery)
Material	Aluminum alloy
Finish	Confirm selected finish

Video, display and voice

Languages	Chinese, English, Portuguese, Spanish, French, Arabic, Indonesian, Russian
-----------	--

Selection notes

Battery capacity is not specified; confirm the supplied rechargeable battery.

User capacity

Fingerprints	100
Passwords	100
Cards	100
Faces	100

Installation and door fit

Door type	Wood, metal and PVC doors
Door thickness	35-65 mm
Panel dimensions	Front and rear: 280 × 52 mm (height × width)
Lock body / mortise	60 mm lock-body specification; confirm body type and door preparation

Packing

Box dimensions	325 × 165 × 105 mm
Box weight	Confirm selected version
Carton dimensions	555 × 340 × 455 mm
Units per carton	10
Carton weight	Confirm selected version

N01 Rim-Mounted Smart Lock

Rim-Mounted Smart Locks



Rim-mounted fingerprint, passcode, card and key model with an optional door sensor; confirm power, app version and installation dimensions before sampling.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Confirm selected version
Optional functions	Door sensor (optional; confirm selected version)

Power, material and environment	
Power supply	Confirm selected version
Material	Aluminum alloy
Finish	Confirm selected finish

Installation and door fit	
Door type	Wood and metal doors
Door thickness	30-60 mm
Panel dimensions	Confirm selected version
Lock body / mortise	Rim-mounted body; dimensions and mounting preparation require confirmation

Supported versions	
Catalogue versions	Confirm selected version

User capacity	
Fingerprints	100
Passwords	100
Cards	100

Additional catalogue specifications	
Voice guidance	Confirm selected version

Packing	
Dimensions, weights and carton quantity	Confirm selected version

Selection notes	
The source calls this a Bullhead Lock. Confirm the rim body, strike and door handing for the installation.	

DS01 Deadbolt Smart Lock

Deadbolt Smart Locks



Compact deadbolt with four access methods, four voice languages and an optional door sensor; select one catalogue configuration for the project.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Bluetooth version; Catalogue-labeled standalone Wi-Fi configuration (confirm network and app behavior); TTLock version (confirm connectivity and gateway requirements). Select one version.
Optional functions	Door sensor (optional; confirm selected version)

Supported versions	
Catalogue versions	Standalone (Wi-Fi; confirm configuration), Tuya (Bluetooth), TTLock, T3 configuration (confirm specification)

Power, material and environment	
Power supply	6 V (4 × AA alkaline batteries)
Material	Aluminum alloy
Finish	Confirm selected finish

Selection notes	
The source labels a 'Standalone (Wi-Fi)' version. Confirm its network and app behavior; this label does not identify a Tuya Wi-Fi version. T3 is a source-listed configuration label; its platform and features require confirmation.	

User capacity	
Fingerprints	100
Passwords	100
Cards	100

Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	35-55 mm
Panel dimensions	Front: 136 × 65 mm; rear: 140 × 68 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation

Video, display and voice	
Languages	Chinese, English, Spanish, Portuguese

Packing	
Box dimensions	225 × 162 × 85 mm
Box weight	0.91 kg
Carton dimensions	470 × 340 × 445 mm
Units per carton	20
Carton weight	18.4 kg

DS02 Deadbolt Smart Lock

Deadbolt Smart Locks



Button-keypad deadbolt with fingerprint and passcode slots plus mechanical-key access. Tuya Bluetooth and TTLock are separate source-listed versions.


REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, Mechanical key
Communication	Tuya Bluetooth version; TTLock version (confirm connectivity and gateway requirements). Select one version.
Optional functions	Door sensor (optional; confirm selected version)
Supported versions	
Catalogue versions	Tuya (Bluetooth), TTLock
Power, material and environment	
Power supply	6 V (4 × AA alkaline batteries)
Material	Aluminum alloy
Finish	Confirm selected finish
Video, display and voice	
Languages	Chinese, English, Spanish, Portuguese

User capacity	
Fingerprints	100
Passwords	100
Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	35-55 mm
Panel dimensions	Front: 129 × 68 mm; rear: 140 × 68 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation
Packing	
Box dimensions	225 × 162 × 85 mm
Box weight	0.7 kg
Carton dimensions	470 × 340 × 445 mm
Units per carton	20
Carton weight	14.8 kg

DS04 Deadbolt Smart Lock

Deadbolt Smart Locks

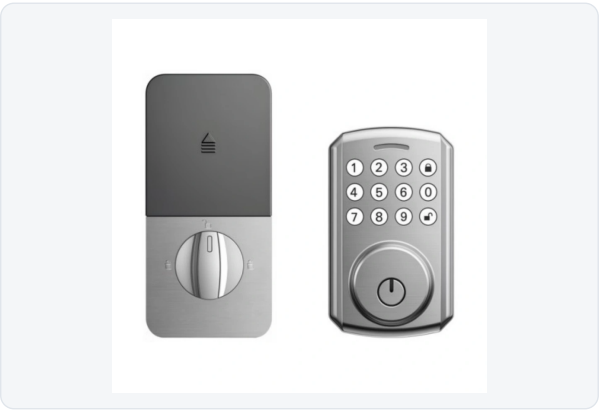

Passcode-and-key deadbolt with 100 passcode slots and an optional door sensor. Fingerprint and RF-card functions are not listed for DS04.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Passcode, Mechanical key
Communication	Tuya Bluetooth version. Select one version.
Optional functions	Door sensor (optional; confirm selected version)
Supported versions	
Catalogue versions	Standalone, Tuya (Bluetooth)
Power, material and environment	
Power supply	6 V (4 × AA alkaline batteries)
Material	Aluminum alloy
Finish	Confirm selected finish
Additional catalogue specifications	
Voice guidance	Not supported

User capacity	
Passwords	100
Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	35-55 mm
Panel dimensions	Front: 114 × 67 mm; rear: 140 × 68 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation
Packing	
Box dimensions	225 × 162 × 85 mm
Box weight	0.69 kg
Carton dimensions	470 × 340 × 445 mm
Units per carton	20
Carton weight	15.3 kg

DS05 Deadbolt Smart Lock

Deadbolt Smart Locks



Fingerprint keypad deadbolt for wood and metal doors, with card/key access, four listed voice languages and separate catalogue version choices.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Bluetooth version; Catalogue-labeled standalone Wi-Fi configuration (confirm network and app behavior); TTFlock version (confirm connectivity and gateway requirements). Select one version.
Optional functions	Door sensor (optional; confirm selected version)

Supported versions	
Catalogue versions	Standalone (Wi-Fi; confirm configuration), Tuya (Bluetooth), TTFlock, T3 configuration (confirm specification)

Power, material and environment	
Power supply	6 V (4 × AA alkaline batteries)
Material	Aluminum alloy
Finish	Confirm selected finish

Selection notes	
The source labels a 'Standalone (Wi-Fi)' version. Confirm its network and app behavior; this label does not identify a Tuya Wi-Fi version. T3 is a source-listed configuration label; its platform and features require confirmation.	

User capacity	
Fingerprints	100
Passwords	100
Cards	100

Installation and door fit	
Door type	Wood and metal doors
Door thickness	35-55 mm
Panel dimensions	Front: 140 × 65 mm; rear: 140 × 68 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation

Video, display and voice	
Languages	Chinese, English, Spanish, Portuguese

Packing	
Box dimensions	225 × 162 × 85 mm
Box weight	0.83 kg
Carton dimensions	470 × 340 × 445 mm
Units per carton	20
Carton weight	17 kg

DS06 Deadbolt Smart Lock

Deadbolt Smart Locks



Deadbolt model with 100 fingerprint, passcode and card slots plus mechanical-key access, the source's standalone Wi-Fi label and an optional door sensor; packing weights need confirmation.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Catalogue-labeled standalone Wi-Fi configuration (confirm network and app behavior). Select one version.
Optional functions	Door sensor (optional; confirm selected version)

Supported versions	
Catalogue versions	Standalone (Wi-Fi; confirm configuration)

Additional catalogue specifications	
Voice guidance	Not supported

Packing	
Box dimensions	225 × 162 × 85 mm
Box weight	Confirm selected version
Carton dimensions	470 × 340 × 445 mm
Units per carton	20
Carton weight	Confirm selected version

User capacity	
Fingerprints	100
Passwords	100
Cards	100


Power, material and environment	
Power supply	6 V (4 × AA alkaline batteries)
Material	Aluminum alloy
Finish	Confirm selected finish

Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	35-55 mm
Panel dimensions	Front: 140 × 65 mm; rear: 140 × 68 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation

Selection notes	
The source labels a 'Standalone (Wi-Fi)' version. Confirm its network and app behavior; this label does not identify a Tuya Wi-Fi version. Camera resolution and display specifications are not listed; confirm any requirement with the selected version.	

DS07 Deadbolt Smart Lock

Deadbolt Smart Locks

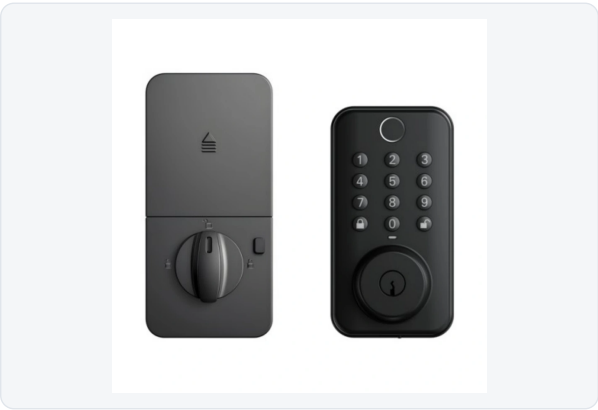

Button-keypad fingerprint deadbolt with mechanical-key access and an optional door sensor. Card access is not listed for DS07.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, Mechanical key
Communication	Catalogue-labeled standalone Wi-Fi configuration (confirm network and app behavior). Select one version.
Optional functions	Door sensor (optional; confirm selected version)
Supported versions	
Catalogue versions	Standalone (Wi-Fi; confirm configuration)
Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	35-55 mm
Panel dimensions	Front: 128 × 67 mm; rear: 140 × 68 mm (height × width)
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation
Additional catalogue specifications	
Voice guidance	Not supported

User capacity	
Fingerprints	100
Passwords	100
Power, material and environment	
Power supply	6 V (4 × AA alkaline batteries)
Material	Aluminum alloy
Finish	Confirm selected finish
Packing	
Box dimensions	225 × 162 × 85 mm
Box weight	0.69 kg
Carton dimensions	470 × 340 × 445 mm
Units per carton	20
Carton weight	15.3 kg
Selection notes	
The source labels a 'Standalone (Wi-Fi)' version. Confirm its network and app behavior; this label does not identify a Tuya Wi-Fi version.	

Q1 Knob Smart Lock

Knob Smart Locks



Fingerprint keypad knob with 100 fingerprint and passcode slots, mechanical-key access and separate Tuya Bluetooth or TTLock versions for interior door projects.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, Mechanical key
Communication	Tuya Bluetooth version; TTLock version (confirm connectivity and gateway requirements). Select one version.
Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	30-50 mm
Panel dimensions	Knob diameter: 74 mm; front projection: 80 mm; rear projection: 75 mm
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation
Additional catalogue specifications	
Voice guidance	Not supported
Selection notes	
RF-card access is not listed on the source page.	

Supported versions	
Catalogue versions	Tuya (Bluetooth), TTLock
User capacity	
Fingerprints	100
Passwords	100
Power, material and environment	
Power supply	6 V (4 × AA alkaline batteries)
Material	Aluminum alloy
Finish	Confirm selected finish
Packing	
Box dimensions	240 × 165 × 88 mm
Box weight	0.9 kg
Carton dimensions	500 × 345 × 465 mm
Units per carton	20
Carton weight	18.9 kg

Q2 Knob Smart Lock

Knob Smart Locks



Keypad knob with listed fingerprint, passcode and card capacities, mechanical-key access and six voice languages; confirm its standalone Wi-Fi configuration.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Catalogue-labeled standalone Wi-Fi configuration (confirm network and app behavior). Select one version.

Installation and door fit	
Door type	Wood, metal and PVC doors
Door thickness	30-50 mm
Panel dimensions	Knob diameter: 74 mm; front projection: 60 mm; rear projection: 75 mm
Lock body / mortise	60 / 70 mm latch backset options; confirm door preparation

Video, display and voice	
Languages	Chinese, English, Spanish, Portuguese, Arabic, Russian

Selection notes	
The source labels a 'Standalone (Wi-Fi)' version. Confirm its network and app behavior; this label does not identify a Tuya Wi-Fi version.	

Supported versions	
Catalogue versions	Standalone (Wi-Fi; confirm configuration)

User capacity	
Fingerprints	100
Passwords	100
Cards	100

Power, material and environment	
Power supply	6 V (4 × AA alkaline batteries)
Material	Aluminum alloy
Finish	Confirm selected finish

Packing	
Box dimensions	240 × 165 × 88 mm
Box weight	0.9 kg
Carton dimensions	500 × 345 × 465 mm
Units per carton	20
Carton weight	18.9 kg

A5 Door Access Smart Lock

Glass & Sliding Door Smart Locks



Access-control model from the glass/sliding-door chapter, with fingerprint, passcode, card and key access; confirm mounting hardware and the actual door installation.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Confirm selected version
Optional functions	Door sensor (optional; confirm selected version)

Supported versions	
Catalogue versions	Confirm selected version

User capacity	
Fingerprints	100
Passwords	100
Cards	100

Power, material and environment	
Power supply	Confirm selected version
Material	Aluminum alloy
Finish	Confirm selected finish

Installation and door fit	
Door type	Wood, metal and sliding doors; glass fit requires confirmation
Door thickness	35-55 mm (source door-thickness range; confirm installation)
Panel dimensions	Confirm selected version
Lock body / mortise	Confirm selected version

Additional catalogue specifications	
Voice guidance	Confirm selected version

Packing	
Dimensions, weights and carton quantity	Confirm selected version

Selection notes	
The glass/sliding-door chapter is a sourcing category. Confirm glass or sliding-door installation, mounting hardware and door preparation; the listed door-thickness range does not establish glass clamping thickness.	

A16 Door Access Smart Lock

Glass & Sliding Door Smart Locks



Fingerprint, passcode and key model appearing in the glass chapter. The page specifies wood, metal and PVC doors; confirm glass or sliding-door suitability separately.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, Mechanical key
Communication	Confirm selected version
Optional functions	Door sensor (optional; confirm selected version)
User capacity	
Fingerprints	100
Passwords	100
Packing	
Dimensions, weights and carton quantity	Confirm selected version
Selection notes	
The glass/sliding-door chapter is a sourcing category. Confirm glass or sliding-door installation, mounting hardware and door preparation; the listed door-thickness range does not establish glass clamping thickness. The source labels A16 as a Panel Lock; RF-card access is not listed.	

Supported versions	
Catalogue versions	Confirm selected version
Power, material and environment	
Power supply	Confirm selected version
Material	Aluminum alloy
Finish	Confirm selected finish
Installation and door fit	
Door type	Wood, metal and PVC doors; glass/sliding-door fit requires confirmation
Door thickness	35-50 mm (source door-thickness range; confirm installation)
Panel dimensions	Confirm selected version
Lock body / mortise	Confirm selected version
Additional catalogue specifications	
Voice guidance	Confirm selected version

B02 Door Access Smart Lock

Glass & Sliding Door Smart Locks



Separate-panel access model with 100 fingerprint, passcode and card slots and optional door sensing; confirm power, installation and app availability for the project.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Confirm selected version
Optional functions	Door sensor (optional; confirm selected version)

Supported versions	
Catalogue versions	Confirm selected version

Power, material and environment	
Power supply	Confirm selected version
Material	Aluminum alloy
Finish	Confirm selected finish

Selection notes	
The glass/sliding-door chapter is a sourcing category. Confirm glass or sliding-door installation, mounting hardware and door preparation; the listed door-thickness range does not establish glass clamping thickness. The source labels this model as a Panel Lock within the glass chapter.	

User capacity	
Fingerprints	100
Passwords	100
Cards	100

Installation and door fit	
Door type	Wood, metal and sliding doors; glass fit requires confirmation
Door thickness	35-55 mm (source door-thickness range; confirm installation)
Panel dimensions	Confirm selected version
Lock body / mortise	Confirm selected version

Additional catalogue specifications	
Voice guidance	Confirm selected version

Packing	
Dimensions, weights and carton quantity	Confirm selected version

B03 Door Access Smart Lock

Glass & Sliding Door Smart Locks



Fingerprint keypad access model from the glass/sliding-door chapter, with an optional door sensor and project-specific mounting details to confirm before sampling.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Confirm selected version
Optional functions	Door sensor (optional; confirm selected version)

Supported versions	
Catalogue versions	Confirm selected version

Power, material and environment	
Power supply	Confirm selected version
Material	Aluminum alloy
Finish	Confirm selected finish

Selection notes	
The glass/sliding-door chapter is a sourcing category. Confirm glass or sliding-door installation, mounting hardware and door preparation; the listed door-thickness range does not establish glass clamping thickness. The source labels this model as a Panel Lock within the glass chapter.	

User capacity	
Fingerprints	100
Passwords	100
Cards	100


Installation and door fit	
Door type	Wood, metal and sliding doors; glass fit requires confirmation
Door thickness	35-55 mm (source door-thickness range; confirm installation)
Panel dimensions	Confirm selected version
Lock body / mortise	Confirm selected version

Additional catalogue specifications	
Voice guidance	Confirm selected version

Packing	
Dimensions, weights and carton quantity	Confirm selected version

H-03 3D Face Recognition Smart Lock

Face Recognition Smart Locks

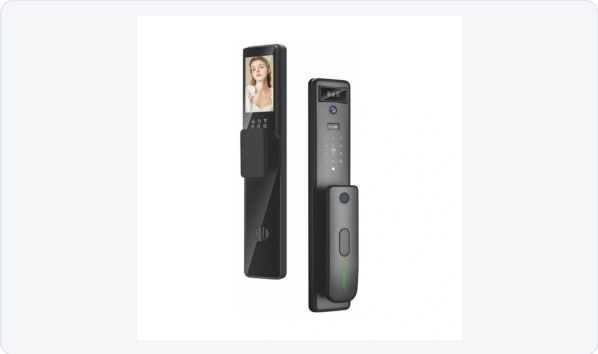

3D face-recognition model with 20 face groups, an indoor HD display and a 4200 mAh battery specification for residential door-fit and sample evaluation.


REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	3D face recognition, Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Wi-Fi version (confirm network configuration). Select one version.
User capacity	
Passwords	100
Cards	100
Faces	20
Additional catalogue specifications	
Voice guidance	Confirm selected version
Fingerprint sensor	Semiconductor fingerprint collector; capacity is not specified
Emergency power	USB emergency power
Relative humidity	20-90% RH (catalogue-listed operating range)
Emergency cylinder	Catalogue 'Class C' Chinese cylinder classification; confirm documentation for the selected cylinder
Face enrollment	20 face groups (source terminology); confirm enrollment behavior
Packing	
Dimensions, weights and carton quantity	Confirm selected version

Supported versions	
Catalogue versions	Tuya (Wi-Fi; confirm configuration)
Power, material and environment	
Power supply	4200 mAh battery (chemistry to be confirmed)
Material	A3 steel + aluminum alloy
Finish	Sky grey (confirm selected finish)
Working temperature	-20 to 60 °C
Installation and door fit	
Door type	Aluminum doors listed; confirm selected door construction
Door thickness	40-120 mm
Panel dimensions	Overall: 420 × 75 mm (height × width)
Lock body / mortise	Confirm selected version
Video, display and voice	
Display	Indoor HD display; size not specified
Camera	Wide-angle camera; resolution not specified
Selection notes	
The source lists 4200 mAh without a battery chemistry or voltage; confirm the supplied power pack.	

H-18 3D Face Recognition Smart Lock

Face Recognition Smart Locks

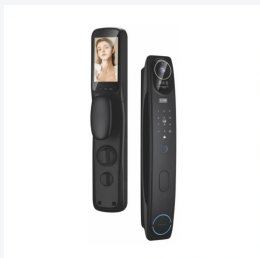

A 439 mm 3D face model with a video-intercom configuration and optional palm-vein recognition; select the biometric and network version before sampling.

[REQUEST A MODEL QUOTE](#)

Access and app options

Catalogue access functions	3D face recognition, Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Wi-Fi version (confirm network configuration). Select one version.
Optional functions	Palm vein recognition (optional; confirm selected version)

Supported versions

Catalogue versions	Tuya (Wi-Fi; confirm configuration)
---------------------------	-------------------------------------

User capacity

Passwords	100
Cards	100
Faces	20

Installation and door fit

Door type	Aluminum doors listed; confirm selected door construction
Door thickness	40-120 mm
Panel dimensions	Overall: 439 × 72 mm (height × width)
Lock body / mortise	Confirm selected version

Selection notes

The source lists 4200 mAh without a battery chemistry or voltage; confirm the supplied power pack. Palm vein recognition is optional and requires configuration confirmation; no palm-print access is specified.

Power, material and environment

Power supply	4200 mAh battery (chemistry to be confirmed)
Material	Aluminum alloy
Finish	Black (confirm selected finish)
Working temperature	-20 to 60 °C

Video, display and voice

Display	Indoor HD display; size not specified
Camera	Wide-angle camera; resolution not specified

Additional catalogue specifications


Voice guidance	Confirm selected version
Fingerprint sensor	Semiconductor fingerprint collector; capacity is not specified
Emergency power	USB emergency power
Relative humidity	20-90% RH (catalogue-listed operating range)
Emergency cylinder	Catalogue 'Class C' Chinese cylinder classification; confirm documentation for the selected cylinder
Face enrollment	20 face groups (source terminology); confirm enrollment behavior

Packing

Dimensions, weights and carton quantity	Confirm selected version
--	--------------------------

H-21 3D Face Recognition Smart Lock

Face Recognition Smart Locks

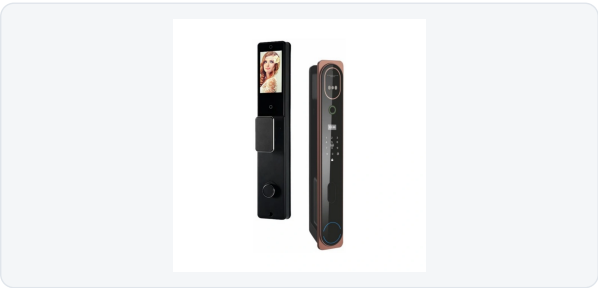

CNC-engraved 3D face model with a 439 × 70 mm format and optional palm-vein recognition, offering a distinct panel specification for brand evaluation.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	3D face recognition, Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Wi-Fi version (confirm network configuration). Select one version.
Optional functions	Palm vein recognition (optional; confirm selected version)

Video, display and voice	
Display	Indoor HD display; size not specified
Camera	Wide-angle camera; resolution not specified

Additional catalogue specifications	
Voice guidance	Confirm selected version
Fingerprint sensor	Semiconductor fingerprint collector; capacity is not specified
Emergency power	USB emergency power
Relative humidity	20-90% RH (catalogue-listed operating range)
Emergency cylinder	Catalogue 'Class C' Chinese cylinder classification; confirm documentation for the selected cylinder
Face enrollment	20 face groups (source terminology); confirm enrollment behavior

Selection notes	
The source lists 4200 mAh without a battery chemistry or voltage; confirm the supplied power pack. Palm vein recognition is optional and requires configuration confirmation; no palm-print access is specified.	

Supported versions	
Catalogue versions	Tuya (Wi-Fi; confirm configuration)

User capacity	
Passwords	100
Cards	100
Faces	20

Power, material and environment	
Power supply	4200 mAh battery (chemistry to be confirmed)
Material	Aluminum alloy; CNC engraving
Finish	Mocha gold / black (confirm selected finish)
Working temperature	-20 to 60 °C

Installation and door fit	
Door type	Aluminum doors listed; confirm selected door construction
Door thickness	40-120 mm
Panel dimensions	Overall: 439 × 70 mm (height × width)
Lock body / mortise	Confirm selected version

Packing	
Dimensions, weights and carton quantity	Confirm selected version

H-22 3D Face Recognition Smart Lock

Face Recognition Smart Locks



A 440 mm 3D face model with an indoor HD display, video-intercom configuration and optional palm-vein access for residential OEM projects.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	3D face recognition, Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Wi-Fi version (confirm network configuration). Select one version.
Optional functions	Palm vein recognition (optional; confirm selected version)

Video, display and voice	
Display	Indoor HD display; size not specified
Camera	Wide-angle camera; resolution not specified

Additional catalogue specifications	
Voice guidance	Confirm selected version
Fingerprint sensor	Semiconductor fingerprint collector; capacity is not specified
Emergency power	USB emergency power
Relative humidity	20-90% RH (catalogue-listed operating range)
Emergency cylinder	Catalogue 'Class C' Chinese cylinder classification; confirm documentation for the selected cylinder
Face enrollment	20 face groups (source terminology); confirm enrollment behavior

Selection notes	
The source lists 4200 mAh without a battery chemistry or voltage; confirm the supplied power pack. Palm vein recognition is optional and requires configuration confirmation; no palm-print access is specified.	

Supported versions	
Catalogue versions	Tuya (Wi-Fi; confirm configuration)

User capacity	
Passwords	100
Cards	100
Faces	20

Power, material and environment	
Power supply	4200 mAh battery (chemistry to be confirmed)
Material	Aluminum alloy
Finish	Black / red antique brass (confirm selected finish)
Working temperature	-20 to 60 °C

Installation and door fit	
Door type	Aluminum doors listed; confirm selected door construction
Door thickness	40-120 mm
Panel dimensions	Overall: 440 × 70 mm (height × width)
Lock body / mortise	Confirm selected version

Packing	
Dimensions, weights and carton quantity	Confirm selected version

H-23 3D Face Recognition Smart Lock

Face Recognition Smart Locks



CNC-engraved 420 mm face-recognition model with 20 face groups and optional palm-vein access; confirm the final biometric and video configuration.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	3D face recognition, Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Wi-Fi version (confirm network configuration). Select one version.
Optional functions	Palm vein recognition (optional; confirm selected version)

Supported versions	
Catalogue versions	Tuya (Wi-Fi; confirm configuration)

User capacity	
Passwords	100
Cards	100
Faces	20

Installation and door fit	
Door type	Aluminum doors listed; confirm selected door construction
Door thickness	40-120 mm
Panel dimensions	Overall: 420 × 76 mm (height × width)
Lock body / mortise	Confirm selected version

Selection notes	
The source lists 4200 mAh without a battery chemistry or voltage; confirm the supplied power pack. Palm vein recognition is optional and requires configuration confirmation; no palm-print access is specified.	

Power, material and environment	
Power supply	4200 mAh battery (chemistry to be confirmed)
Material	Aluminum alloy; CNC engraving
Finish	Black (confirm selected finish)
Working temperature	-20 to 60 °C


Video, display and voice	
Display	Indoor HD display; size not specified
Camera	Wide-angle camera; resolution not specified

Additional catalogue specifications	
Voice guidance	Confirm selected version
Fingerprint sensor	Semiconductor fingerprint collector; capacity is not specified
Emergency power	USB emergency power
Relative humidity	20-90% RH (catalogue-listed operating range)
Emergency cylinder	Catalogue 'Class C' Chinese cylinder classification; confirm documentation for the selected cylinder
Face enrollment	20 face groups (source terminology); confirm enrollment behavior

Packing	
Dimensions, weights and carton quantity	Confirm selected version

H-68 3D Face Recognition Smart Lock

Face Recognition Smart Locks

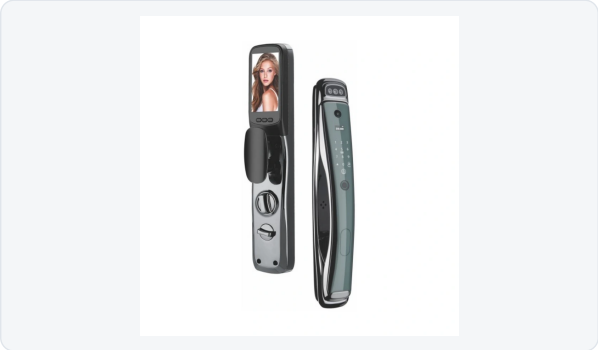

A 460 mm 3D face-recognition model with a wide-angle camera, indoor HD display and a 4200 mAh battery specification for residential project sourcing.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	3D face recognition, Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Wi-Fi version (confirm network configuration). Select one version.
User capacity	
Passwords	100
Cards	100
Faces	20
Video, display and voice	
Display	Indoor HD display; size not specified
Camera	Wide-angle camera; resolution not specified
Additional catalogue specifications	
Voice guidance	Confirm selected version
Fingerprint sensor	Semiconductor fingerprint collector; capacity is not specified
Emergency power	USB emergency power
Relative humidity	20-90% RH (catalogue-listed operating range)
Emergency cylinder	Catalogue 'Class C' Chinese cylinder classification; confirm documentation for the selected cylinder
Face enrollment	20 face groups (source terminology); confirm enrollment behavior

Supported versions	
Catalogue versions	Tuya (Wi-Fi; confirm configuration)
Power, material and environment	
Power supply	4200 mAh battery (chemistry to be confirmed)
Material	Aluminum alloy
Finish	Bright gunmetal (confirm selected finish)
Working temperature	-20 to 60 °C
Installation and door fit	
Door type	Aluminum doors listed; confirm selected door construction
Door thickness	40-120 mm
Panel dimensions	Overall: 460 × 73 mm (height × width)
Lock body / mortise	Confirm selected version
Packing	
Dimensions, weights and carton quantity	Confirm selected version
Selection notes	
The source lists 4200 mAh without a battery chemistry or voltage; confirm the supplied power pack.	

H-01 Lever Smart Lock

Display & Camera Smart Locks



A 368 mm fingerprint lever model with basic and camera configurations shown separately; confirm the indoor display and Tuya setup on the chosen version.

[REQUEST A MODEL QUOTE](#)

Access and app options

Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Wi-Fi version (confirm network configuration). Select one version.
Optional functions	Camera and indoor display configuration (confirm selected version)

Installation and door fit

Door type	Wooden and security doors; confirm door preparation
Door thickness	40-120 mm
Panel dimensions	Overall: 368 × 72 mm (height × width)
Lock body / mortise	Confirm selected version

Additional catalogue specifications

Voice guidance	Confirm selected version
Fingerprint sensor	Semiconductor fingerprint collector; capacity is not specified
Emergency power	USB emergency power
Relative humidity	20-90% RH (catalogue-listed operating range)
Emergency cylinder	Catalogue 'Class C' Chinese cylinder classification; confirm documentation for the selected cylinder

Supported versions

Catalogue versions	Basic configuration, Camera configuration, Tuya (Wi-Fi; confirm configuration)
---------------------------	--

User capacity

Passwords	100
Cards	100

Power, material and environment

Power supply	Alkaline dry batteries (size and quantity to be confirmed)
Material	A3 steel
Finish	Black (confirm selected finish)
Working temperature	-20 to 60 °C

Video, display and voice

Display	Indoor HD display (camera configuration; confirm selected version)
Camera	Wide-angle camera (camera configuration; confirm selected version)

Packing

Dimensions, weights and carton quantity	Confirm selected version
--	--------------------------

H-05 Lever Smart Lock

Display & Camera Smart Locks



Aluminum lever model with a 390 mm panel and alkaline dry-battery power; basic and camera configurations provide different project selections.

[REQUEST A MODEL QUOTE](#)

Access and app options

Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Wi-Fi version (confirm network configuration). Select one version.
Optional functions	Camera and indoor display configuration (confirm selected version)

User capacity

Passwords	100
Cards	100

Additional catalogue specifications

Voice guidance	Confirm selected version
Fingerprint sensor	Semiconductor fingerprint collector; capacity is not specified
Emergency power	USB emergency power
Relative humidity	20-90% RH (catalogue-listed operating range)
Emergency cylinder	Catalogue 'Class C' Chinese cylinder classification; confirm documentation for the selected cylinder

Packing

Dimensions, weights and carton quantity	Confirm selected version
--	--------------------------

Supported versions

Catalogue versions	Basic configuration, Camera configuration, Tuya (Wi-Fi; confirm configuration)
---------------------------	--

Power, material and environment

Power supply	Alkaline dry batteries (size and quantity to be confirmed)
Material	Aluminum alloy
Finish	Red antique brass / black (confirm selected finish)
Working temperature	-20 to 60 °C

Installation and door fit

Door type	Wooden and security doors; confirm door preparation
Door thickness	40-120 mm
Panel dimensions	Overall: 390 × 75 mm (height × width)
Lock body / mortise	Confirm selected version

Video, display and voice

Display	Indoor HD display (camera configuration; confirm selected version)
Camera	Wide-angle camera (camera configuration; confirm selected version)

H-09 Lever Smart Lock

Display & Camera Smart Locks



A 390 mm fingerprint lever model with catalogue-listed finish choices and basic or camera configurations; confirm display and app functions before ordering.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Wi-Fi version (confirm network configuration). Select one version.
Optional functions	Camera and indoor display configuration (confirm selected version)
User capacity	
Passwords	100
Cards	100
Additional catalogue specifications	
Voice guidance	Confirm selected version
Fingerprint sensor	Semiconductor fingerprint collector; capacity is not specified
Emergency power	USB emergency power
Relative humidity	20-90% RH (catalogue-listed operating range)
Emergency cylinder	Catalogue 'Class C' Chinese cylinder classification; confirm documentation for the selected cylinder
Packing	
Dimensions, weights and carton quantity	Confirm selected version

Supported versions	
Catalogue versions	Basic configuration, Camera configuration, Tuya (Wi-Fi; confirm configuration)
Power, material and environment	
Power supply	Alkaline dry batteries (size and quantity to be confirmed)
Material	Aluminum alloy
Finish	Red antique brass / grey / black (confirm selected finish)
Working temperature	-20 to 60 °C
Installation and door fit	
Door type	Wooden and security doors; confirm door preparation
Door thickness	40-120 mm
Panel dimensions	Overall: 390 × 75 mm (height × width)
Lock body / mortise	Confirm selected version
Video, display and voice	
Display	Indoor HD display (camera configuration; confirm selected version)
Camera	Wide-angle camera (camera configuration; confirm selected version)

H-08 Aluminum Door Smart Lock

Aluminum Door Smart Locks



Narrow 36 mm lever panel from the thermal-break aluminum-door series; confirm the stile, lock body, battery compartment and camera configuration for the installation.

REQUEST A MODEL QUOTE

Access and app options	
Catalogue access functions	Fingerprint, Passcode, RF card, Mechanical key
Communication	Tuya Wi-Fi version (confirm network configuration). Select one version.
Optional functions	Camera configuration (confirm selected version)

Supported versions	
Catalogue versions	Basic configuration, Camera configuration, Tuya (Wi-Fi; confirm configuration)

Installation and door fit	
Door type	Thermal-break aluminum doors in the heading; wood/security doors in the table; confirm installation
Door thickness	40-120 mm
Panel dimensions	Overall: 339 × 36 mm (height × width)
Lock body / mortise	Confirm selected version

Video, display and voice	
Camera	Wide-angle camera (camera configuration; confirm selected version)

Packing	
Dimensions, weights and carton quantity	Confirm selected version

User capacity	
Passwords	100
Cards	100

Power, material and environment	
Power supply	Alkaline dry batteries (size and quantity to be confirmed)
Material	Aluminum alloy
Finish	Black (confirm selected finish)
Working temperature	-20 to 60 °C

Additional catalogue specifications	
Voice guidance	Confirm selected version
Fingerprint sensor	Semiconductor fingerprint collector; capacity is not specified
Emergency power	USB emergency power
Relative humidity	20-90% RH (catalogue-listed operating range)
Emergency cylinder	Catalogue 'Class C' Chinese cylinder classification; confirm documentation for the selected cylinder

Selection notes	
The thermal-break aluminum-door heading and wood/security-door table labels differ; confirm mounting compatibility for the project. Water-resistance rating and test documentation are not provided; confirm environmental suitability before selecting an installation.	